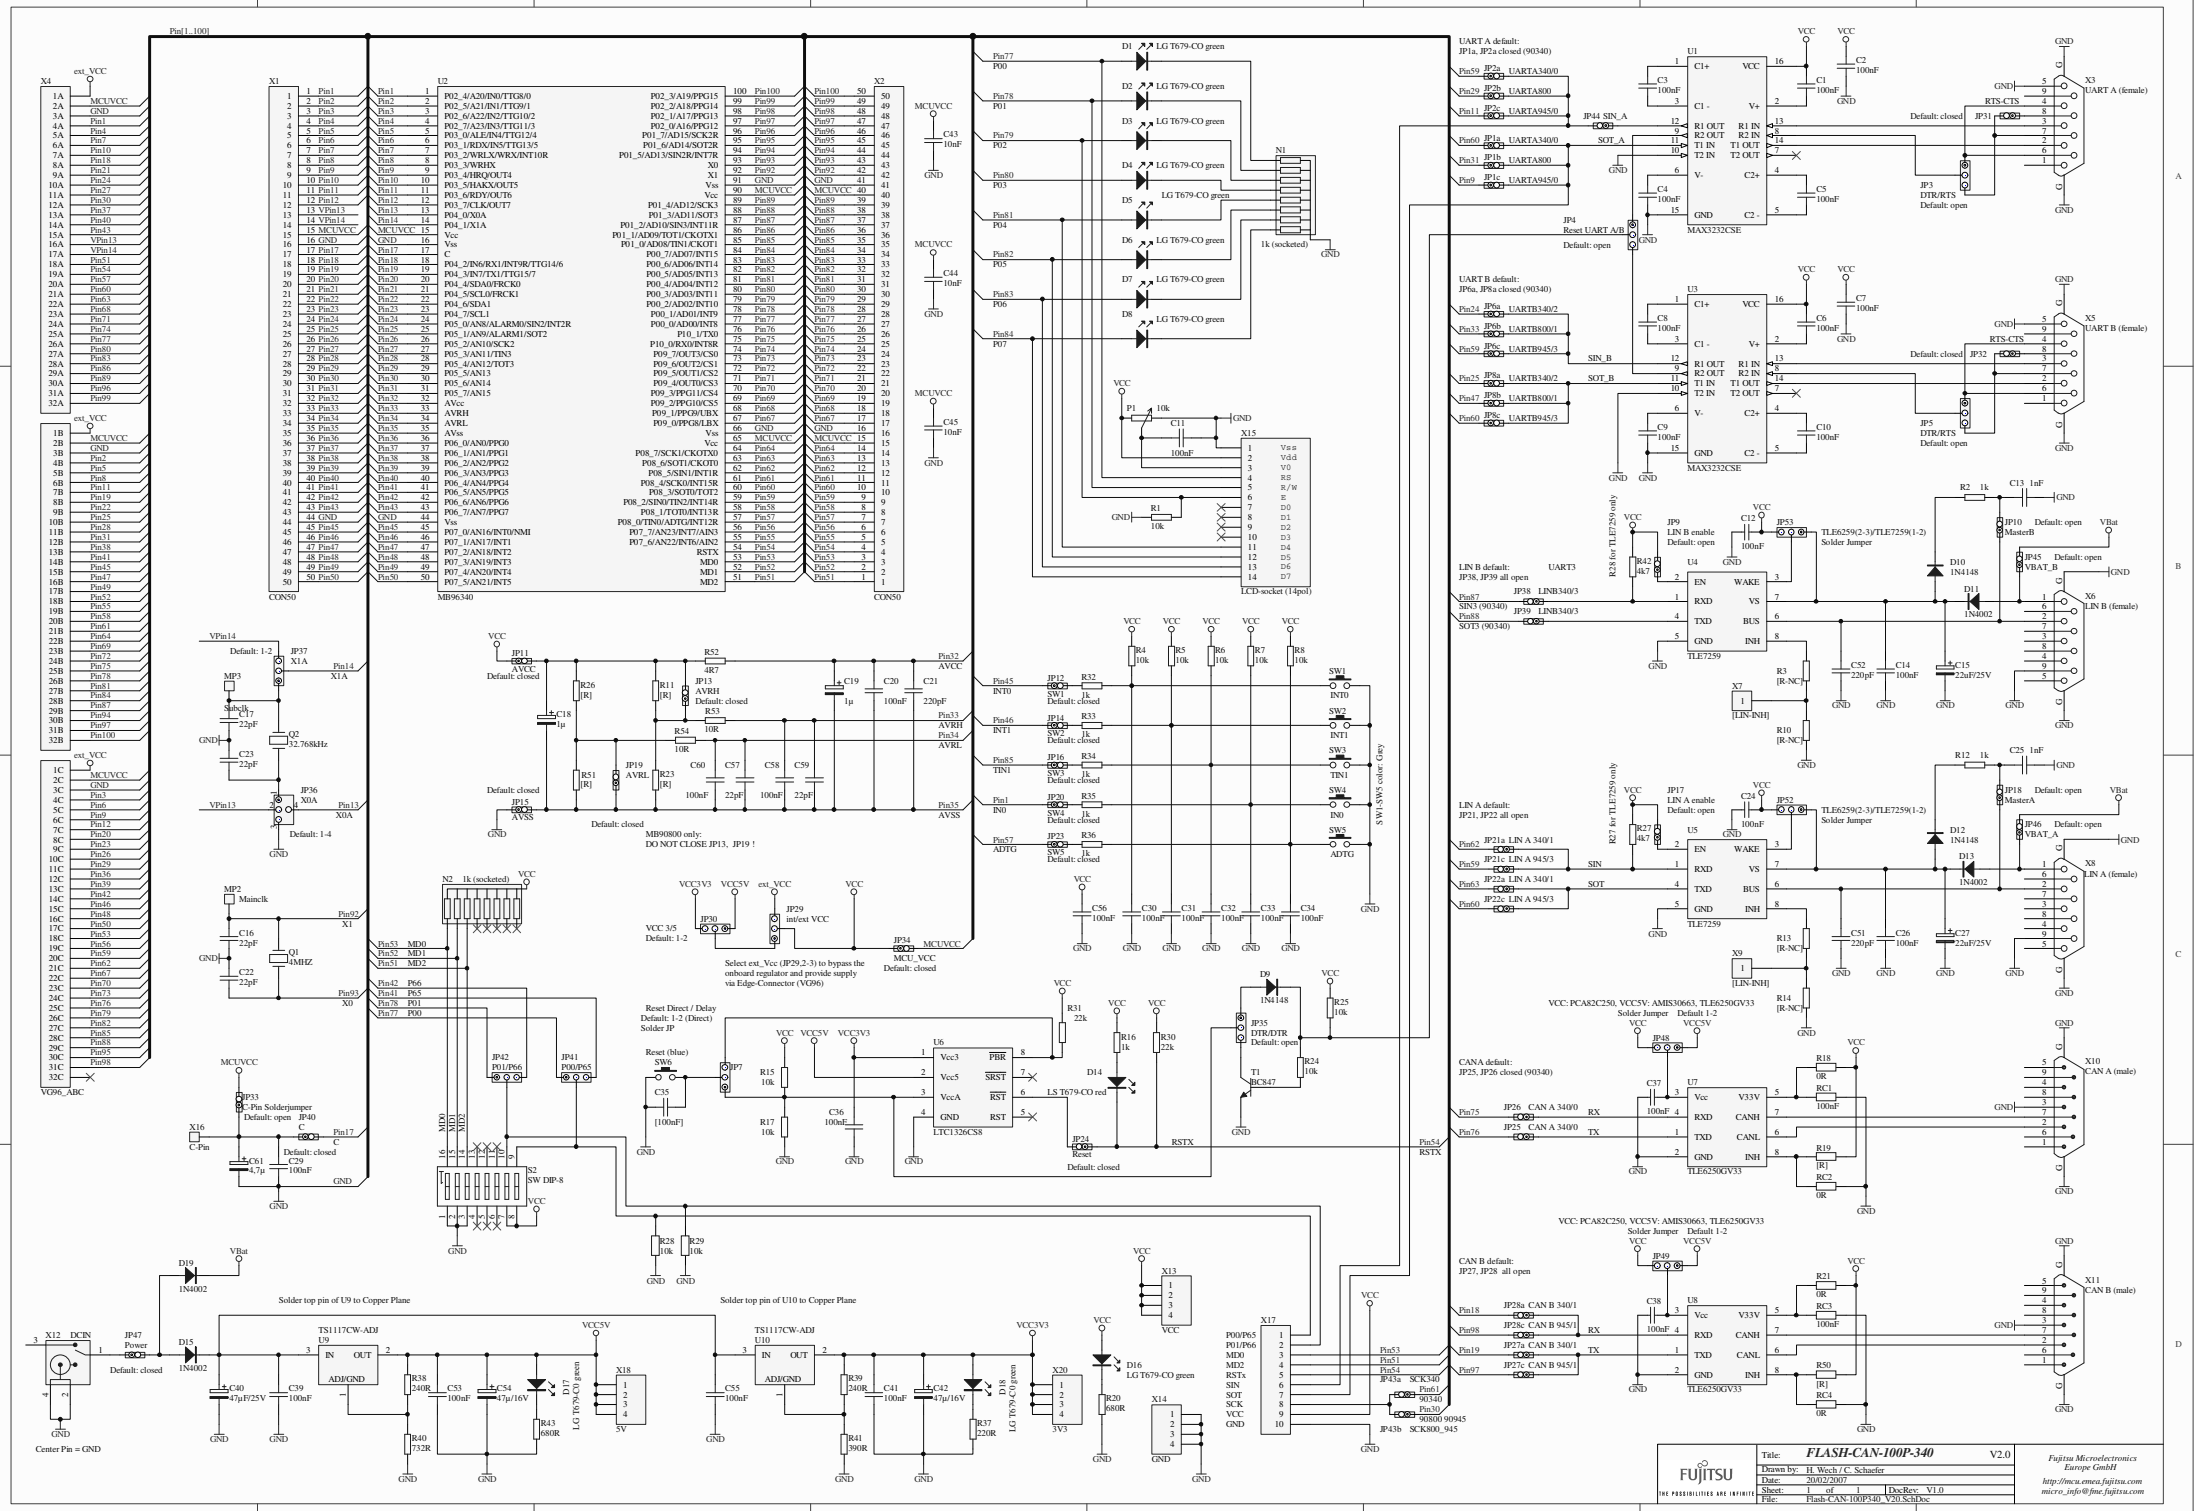
Title: FLASH-CAN-100P-340
V2.0
Drawn by: H. Wech / C. Schaefer
Date: 20/02/2007
Sheet: 1 of 1
DocRev: V1.0
File: Flash-CAN-100P340_V20.SchDoc
FUJITSU
THE POSSIBILITIES ARE INFINITE
Fujitsu Microelectronics Europe GmbH
http://mcu.emea.fujitsu.com
micro_info@fme.fujitsu.com
MB96340
MB90800 only: DO NOT CLOSE JP13, JP19 !
UART A default: JP1a, JP2a closed (90340)
UART B default: JP6a, JP8a closed (90340)
LIN B default: JP38, JP39 all open
LIN A default: JP21, JP22 all open
CANA default: JP25, JP26 closed (90340)
CAN B default: JP27, JP28 all open
VCC: PCA82C250, VCC5V: AMIS30663, TLE6250GV33
LCD-socket (14pol)
Center Pin = GND